(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau





(43) International Publication Date 12 May 2005 (12.05.2005)

PCT

(10) International Publication Number WO 2005/041808 A1

A61C 17/34 (51) International Patent Classification7:

(21) International Application Number:

PCT/KR2004/002780

(22) International Filing Date: 30 October 2004 (30.10.2004)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data: 10-2003-0077408

3 November 2003 (03.11.2003)

(71) Applicant and

(72) Inventor: LEE, Pal-Hyung [KR/KR]; 102-903, SK Apt, Bugok 3-dong, Geumjeong-Gu, Busan 609-323 (KR).

(72) Inventors; and


(75) Inventors/Applicants (for US only): LEE, Hye-Jung [KR/KR]; 102-903, SK Apt, Bugok 3-dong, Geumjeong-Gu, Busan 609-323 (KR). LEE, Jae-Heon

[KR/KR]; 102-903, SK Apt, Bugok 3-dong, Geumjeong-Gu, Busan 609-323 (KR).

- (74) Agent: KIM, Young-Ok; OK International Patent & Law Office, 1242-7 Yeonsan 5-Dong, Yeonje-Gu, Busan 611-085 (KR).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,

[Continued on next page]

(54) Title: DENTAL SCALER

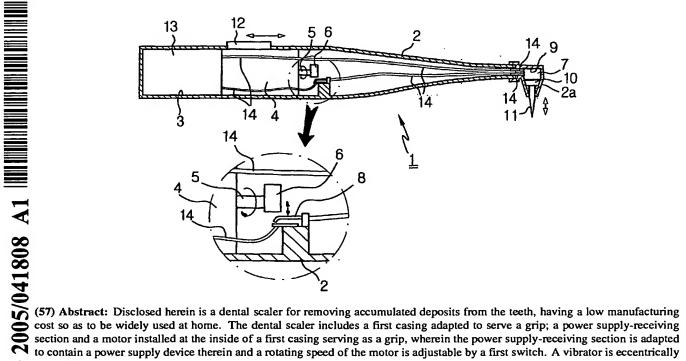

to contain a power supply device therein and a rotating speed of the motor is adjustable by a first switch. A vibrator is eccentrically installed at a driving shaft of the motor to be selectively in electrical contact with a second switch for connecting or disconnecting a power of an electromagnet. An electromagnet-receiving section is formed at the front end portion of the first casing, for containing the electromagnet therein.

WO 2005/041808 A1



SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

with international search report